


SIGNAL CONNECTOR INFORMATION



PIN No.	FUNCTION
1	+VO : +OUTPUT VOLTAGE
2	+S : +SENSING
3	-VO : -OUTPUT VOLTAGE
4	-S : -SENSING
5	NC : NO CONNECTION
6	NC : NO CONNECTION
7	+CNT : REMOTE ON/OFF
8	-CNT : GROUND FOR REMOTE ON/OFF



SIGNAL CONNECTOR USED

PART DESCRIPTION	PART NAME	MANUFACT
PIN HEADER	S8B-PHDSS(LF)(SN) (CN1)	JST

NAME PLATE (SCALE: 1.5:1)

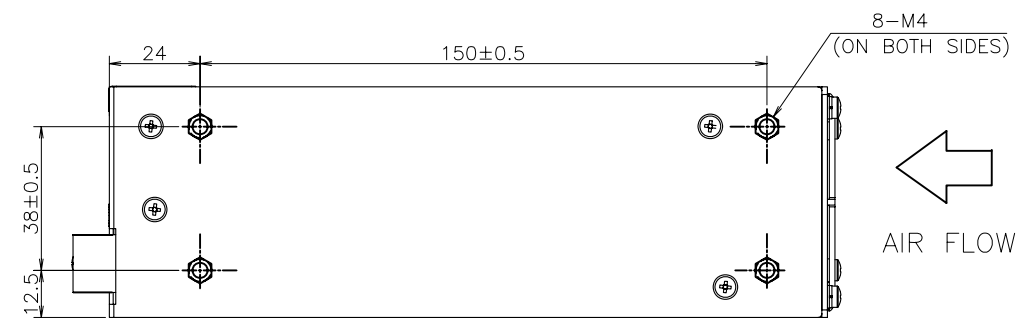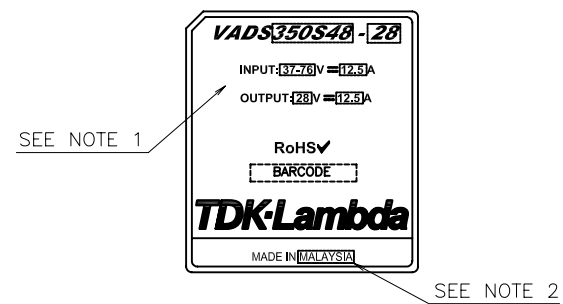

MATCHING HOUSINGS, PIN & TOOL

PART DESCRIPTION	PART NAME	MANUFACT
SOCKET HOUSING	PHDR-8VS (CN1)	JST
TERMINAL PINS	SPHD-002T-P0.5(AWG28~24) SPHD-001T-P0.5(AWG26~22)	JST
HAND CRIMPING TOOL	YRS-620(SPHD-002T-P0.5) YC-610R(SPHD-001T-P0.5)	JST

==ACCESSORIES==

- * COVER FOR BARRIER TERMINAL STRIP ----- 1
(ATTACHED ON TERMINAL AT SHIPMENT)
- * SHORT PIECE ----- 1
SHORTING +VO->+S, -VO->-S
(ATTACHED ON CN1 AT SHIPMENT)

NOTE:

- 1: MODEL NAME, INPUT VOLTAGE RANGE, MAXIMUM INPUT CURRENT, NOMINAL OUTPUT VOLTAGE, AND MAXIMUM OUTPUT CURRENT ARE SHOWN ON THE NAME PLATE IN ACCORDANCE WITH THE SPECIFICATIONS.
- 2: COUNTRY OF MANUFACTURE IS SHOWN ON THE NAME PLATE IN ACCORDANCE WITH THE SPECIFICATIONS.
- 3: M4 TAPPED HOLES (12) FOR CUSTOMER CHASSIS MOUNTING (SCREW PENETRATION DEPTH 5mm MAX.)

(unit : mm)

MODEL	VADS
TDK-Lambda	

PA603-02-01A